


KemTRACK 120

Dual-axis solar tracking systems for up to 123m² module area

- Stable against torsion, hot-dip galvanized steel construction
- Configurable for all wind and snow loads in accordance with DIN EN 1055
- Durable, industrial proven drives
- Maintenance-free friction bearing
- Permanent, accurate astronomic calculation of the position of the sun
- Autarkic control with remote access for every individual tracker
- Low transport costs through screwed, modular components
- Tracker construction with checked statics
- Yield increase by more than 40%
- Project-related individual constructions are possible

Module Field Design

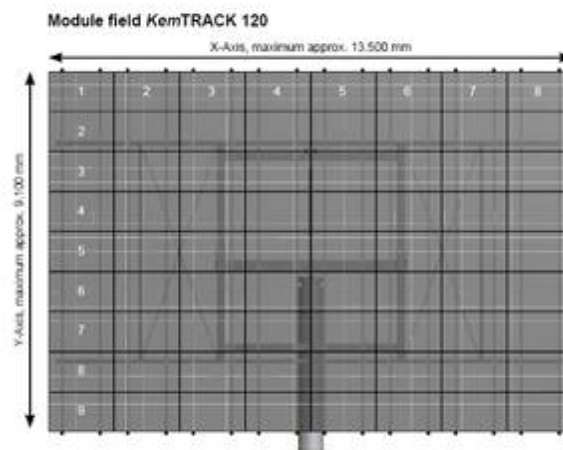

The module area is configurable up to 13.500 mm (X-Axis) and 9.100 mm (Y-Axis). Furthermore, project-related individual constructions are possible.

Further details

- [Technical specifications](#)

Download



[Detailed information to download >>](#)